



Separated Tweeter and Midwoofer crossover

Tweeterhousing with black rubber finish




TECHNICAL SPECIFICATIONS


Model	GZRC 100NEO-IV (Installer version)	
Impedance	3 Ohm	
Frequency response	80Hz – 26kHz	
Cut-off frequency	3500 Hz (12 dB)	
SPL 1W/1M	88 dB	
Power Watt RMS	80	
Power Watt Maximum	120	
Crossover	2- Way	
Crossover parts	MOX resistors / MET & Elko capacitors / PTC	
Crossover function	Adjustable Tweeterlevel	
	Midwoofer	Tweeter (GZRT 25T)
Cone (Dome)	Paper	Titanium
Cone color	Black	Titanium
Surround	Rubber	Rubber
Dustcap	Soft fiber	-
Basket / Frame material	Steel basket	Machined aluminum
Basket / Frame color	Black gloss powder coated	Black anodized
Terminal	Zinc plated solder terminal	Cable
Magnet	Inside-Neodymium	1 x Neodymium
Voice coil	25 mm / 1" copper round wire	25 mm / 1" copper round wire
Voice coil former	Aluminum	Aluminum
RE	3.1 Ohm	3 Ohm
SPL	85 dB	92 dB
FS	86.6 Hz	1500 Hz
QMS	5.78	
QES	0.82	
QTS	0.72	
VAS	2.0L / 0.07 cu.ft	
MMS	6.9 Gr	
BL	3.8 N/A	
RMS	0.7 kg/s	
CMS	0.49 mm/N	
LE	0.32 mH	
Linear Excursion	+ / - 3 mm / 0.12"	
X Max	7 mm / 0.28"	
Frequency response	80 Hz – 3.5 kHz	3 – 26 kHz
Powerhandling	60 / 100 W	70 / 110 W
Outer diameter	102 mm / 4.02"	49.5 mm / 1.95"
Mounting diameter	94 mm / 3.7"	43.10 mm / 1.7"
Mounting depth	31 mm / 1.22"	10 mm / 0.39"




TECHNICAL SPECIFICATIONS

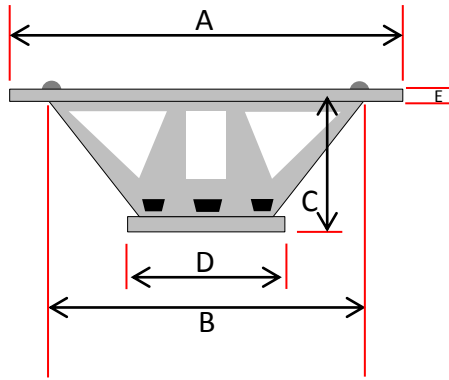

A	102 mm / 4.01"
B	94 mm / 3.7"
C	31 mm / 1.22"
D	54 mm / 2.13"
E	2.5 mm / 0.1"



F	60 mm / 2.36"
G	48 mm / 1.89"
H	27 mm / 1.06"



I	49.5 mm / 1.95"
J	18.8 mm / 0.74"
K	10 mm / 0.39"
L	44 mm / 1.73"



CROSSOVER FUNCTIONS

TW-Level	Effect
- 2 dB / 0 dB / + 2 dB	3 stepped individual tweeter adjustment

